





Tactile Switch $\phi 8\text{mm}$ Waterproof Radial Taping Type

■ Features

- Dustproof and waterproof construction
- Compact size with $\phi 8\text{mm}$ outer diameter
- Switch supply via radial taping method

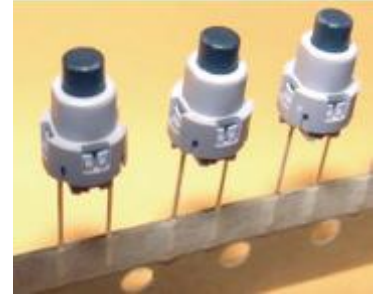

■ Dimensions

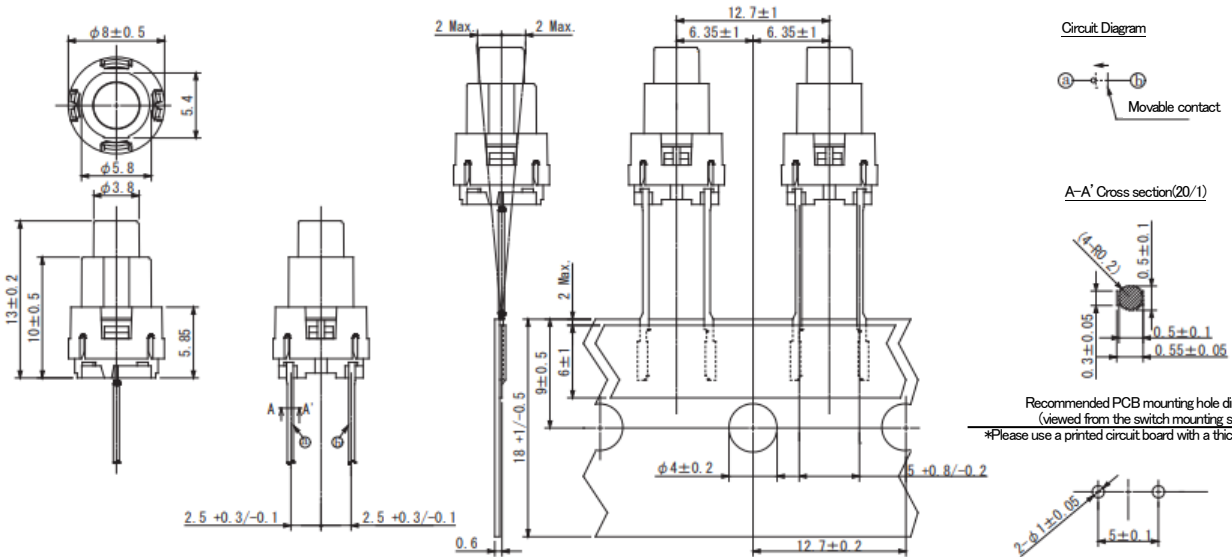

■ Specifications

Item	Rated	Unit	Remarks
Operating Temperature Range	-25 to +85	$^{\circ}\text{C}$	
Storage Temperature Range	-40 to +85	$^{\circ}\text{C}$	
Operation Mode	Tactile feedback		
Circuit Type	Push-on type, 1 circuit, 1 contact		
Rated	MAX 50mA 12VDC		
Contact Resistance	MAX 100	$\text{m}\Omega$	
Insulation Resistance	100M Ω or more at DC 100V		
Withstand voltage	AC 250V for 1 minute		
Bounce	MAX 10	ms	
Operating life	100,000	times	
Actuating force	A : 1.47 ± 0.49 B : 1.96 ± 0.49	N	
Return force	MIN 0.29	N	
Travel	$0.25 \pm 0.2 / -0.1$	mm	
Water Resistance	Immersion in water at $60 \pm 2^{\circ}\text{C}$ (10cm) for 240 hours		

■ Product Name Designation Method

