



Miniature Cermet Trimmer Potentiometers


6mm Size

■ Features

- Both Phillips and flat-head screwdriver is available for adjustment.
- Automatic adjustable
- Achieved good endurance characteristics by using "Metal-glaze" for the material of resistor
- Conforms to RoHS Directives (Lead-Free Products)



■ Outline Dimensions (Unit : mm)

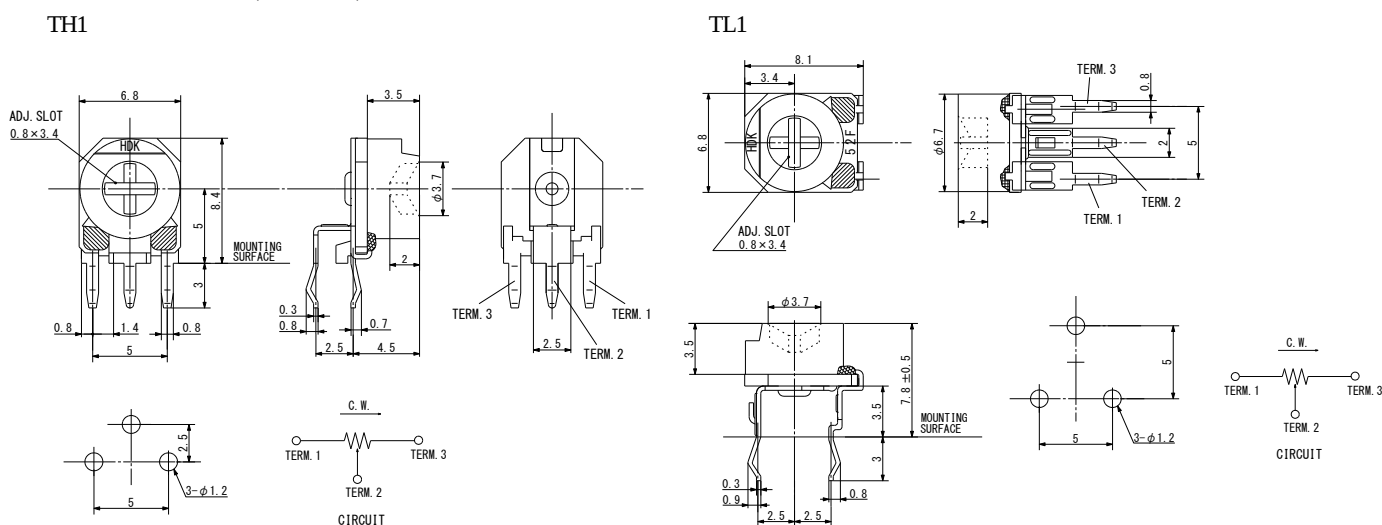


■ Specification

Item	Specification	Unit	Note
Nominal Total Resistance	100~1M	Ω	
Resistance Tolerance	± 25	%	
Rotational Torque	2.94~29.4	mN.m	
Effectively Rotary Angle	240 ± 10	$^{\circ}$	
Rated Wattage	0.2 (at 70°C), 0 (at 100°C)	W	
Max. Rated Voltage	100 or $V = \sqrt{PR}$ whichever is smaller	V	
T.C.R (Temperature Coefficient)	± 250	ppm/ $^{\circ}\text{C}$	
Operating Temp. Range	-25 ~ +100	$^{\circ}\text{C}$	

■ Part Designation

VG F 67 T H1 B * * *

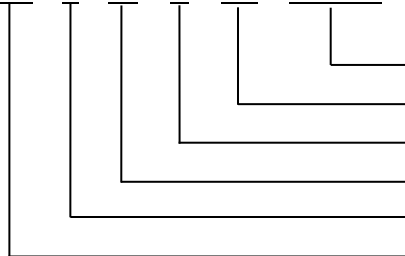

- Resistance law and Resistance value (3 figures)
- Mounting, Terminal (H1 : Vertical, L1 : Horizontal)
- Knob type (Cross slot type)
- Size
- Lead-Free type
- Resistive element type : Metal-glaze

*Packaging Quantity : 500 pcs / bag