




Miniature Cermet Trimmer Potentiometers

6mm Size


■ Features

- Both Phillips and flat-head screwdriver is available for adjustment.
- Automatic adjustable
- Achieved good endurance characteristics by using "Metal-glaze" for the material of resistor
- Conforms to RoHS Directives (Lead-Free Products)

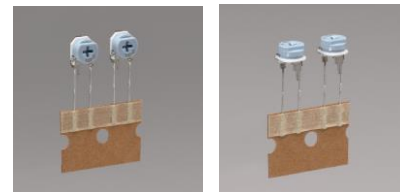


■ Outline Dimensions (Unit : mm)

THT

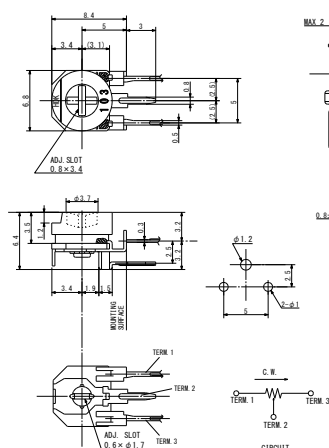


TLTA

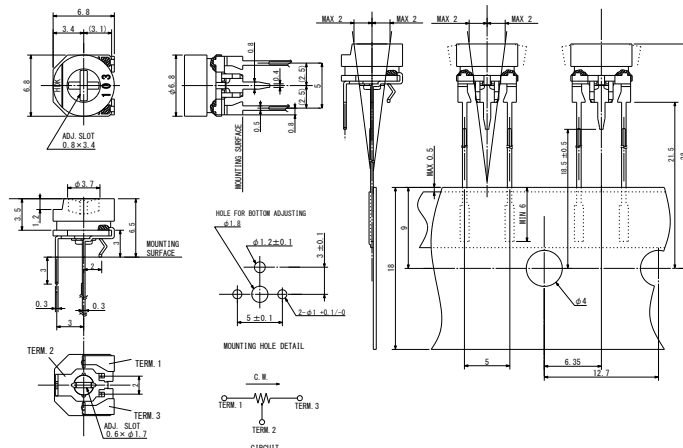

■ Specification

Item	Specification	Unit	Note
Nominal Total Resistance	100~1M	Ω	
Resistance Tolerance	± 30	%	
Rotational Torque	0.98~29.4	mN.m	
Effectively Rotary Angle	240 ± 10	$^{\circ}$	
Rated Wattage	0.3 (at 70°C) , 0 (at 100°C)	W	
Max. Rated Voltage	100 or $V = \sqrt{PR}$ whichever is smaller	V	
T.C.R (Temperature Coefficient)	± 250	ppm/ $^{\circ}\text{C}$	
Operating Temp. Range	-25 ~ +100	$^{\circ}\text{C}$	

■ Part Designation

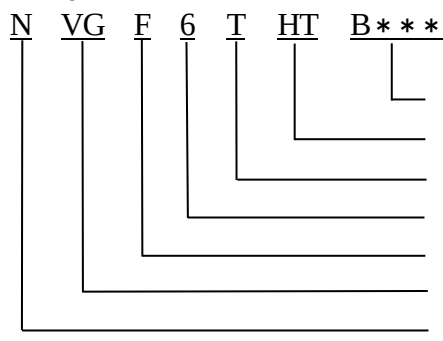

- Resistance law and Resistance value (3 figures)
- Mounting, Terminal (HT : Vertical type taping, LTA : Horizontal type taping)
- Knob type (Cross slot type)
- Size
- Lead-Free type
- Resistive element type : Metal-glaze
- Type

* Packaging Quantity : 1,000pcs/box