



*For Reference Only*

# Product Specification

Item : Pressure Sensor

Product No. : HPD-1000G-R02

Date : Sep. 9 , 2014

### 1. Application



This specification shall be applied to the Semi conductive Pressure sensor used for non-corrosive gases.

### 2. General description

Part No.	Range of pressure	Drive current	Package	Bridge resistance
HPD-1000G-R02	0 ~ 1000 kPa	1.5 mA	SMD 6 pin	5kΩ

### 3. Outline dimension and Construction


#### Dimension

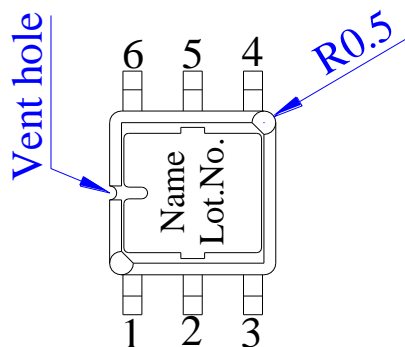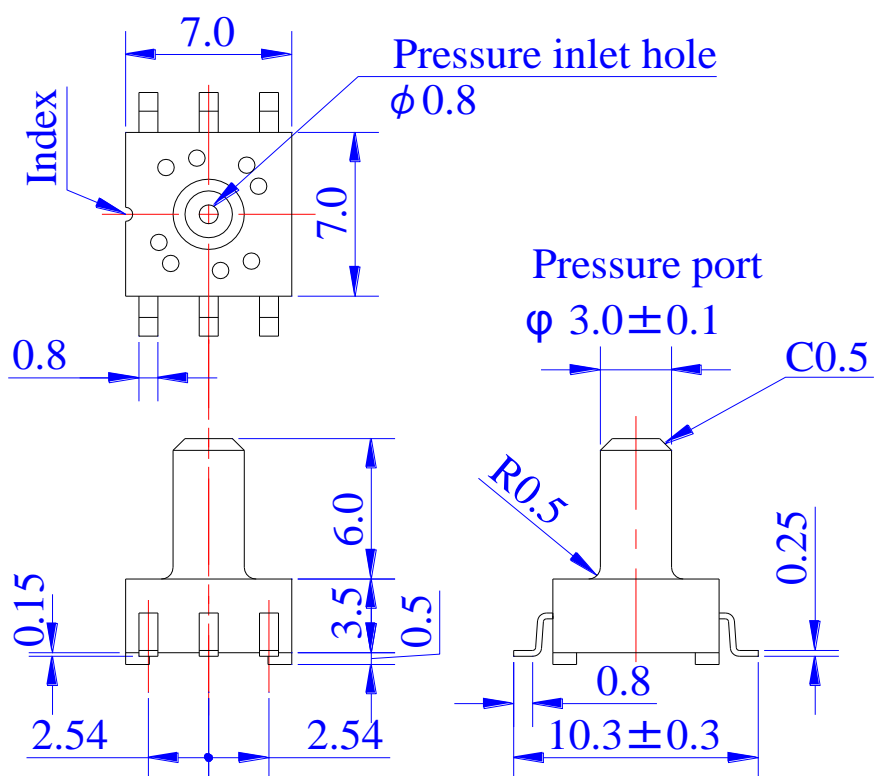

単位  
Unit : mm

一般寸法公差  
General Tolerance :  $\pm 0.2$

#### Internal connection

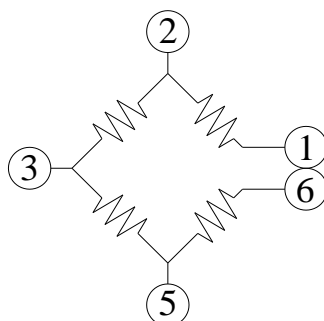

Pin number	Name
1	-Out
2	+Input (Power+)
3	+Out
4	NC (Open)
5	-Input (Power-)
6	-Out



## 3. Rating

### -1. Absolute Maximum Rating

Item	Rating			Unit	Note
	MIN	TYP	MAX		
Pressure type	Gauge Pressure			—	
Medium of pressure	Non-corrosive Gas			—	
Range of maximum pressure			1,500	kPa	
Maximum supply current	—	—	3	mA	
Operating temperature	-30	~	85	°C	
Storage temperature	-40	~	120	°C	

### -2. Rating (I<sub>cc</sub>=1.5mA, T<sub>a</sub>=25degrees C)

Item	Rating			Unit	Note
	MIN	TYP	MAX		
Rated pressure	0	~	1,000	kPa	
Drive current	—	1.5	—	mA	
Bridge resistance	4	5	6	kΩ	
Offset voltage	-20	0	20	mV	
Span voltage	60	100	140	mV	
Pressure linearity	-0.3		0.3	%FS	
Pressure hysteresis	-0.4		0.4	%FS	
Temperature characteristic of Offset voltage	-5.0		5.0	%FS	at 0~50°C
Temperature characteristic of Span voltage	-2.5		2.5	%FS	at 0~50°C

#### <Definitions>

If Pressure=P, Temp.=T, Output voltage=V(P,T)

#### Offset voltage

$$V_{\text{offset}} = V(0,25)$$

#### Span voltage

$$V_{\text{span}} = V(1000,25) - V(0,25)$$

#### Pressure linearity

$$PLIN = (V(500,25) - (V_{\text{span}}/2 + V(0,25))) / V_{\text{span}} \times 100$$

#### Pressure linearity

$$PHYS = (V_{\text{off}2} - V_{\text{off}1}) / V_{\text{span}} \times 100$$

#### Temperature characteristic of Offset voltage

$$TCO1 = (V(0,0) - V(0,25)) / V_{\text{span}} \times 100$$

$$TCO2 = (V(0,50) - V(0,25)) / V_{\text{span}} \times 100$$

#### Temperature characteristic of Span voltage

$$V_{\text{span}}(0) = V(1000,0) - V(0,0)$$

$$V_{\text{span}}(50) = V(1000,50) - V(0,50)$$

$$TCS1 = (V_{\text{span}}(0) - V_{\text{span}}) / V_{\text{span}} \times 100$$

$$TCS2 = (V_{\text{span}}(50) - V_{\text{span}}) / V_{\text{span}} \times 100$$

## 5. Reliability Test Specification



■ Test contents

No.	Item	Test conditions	Testing time
1	High temperature strage test	85°C	300 hr
2	Low temperature strage test	-30°C	300 hr
3	High humidity strage test	40°C、95%RH	300 hr
4	Heat shock test	-30°C ⇔ 85°C、each 30minutes	100 cyc
5	Drop test (Goods)	Dropped from 100cm high to the P tile on concrete grounding	Random 3 times
6	Drop test (Packing)	Dropped from 120cm high to the P tile on concrete grounding	Total 7 times

After tests , Meet this standard.


- Electrical characteristics shall be met.
- There shall be no abnormality in appearance.

## 6. Marking

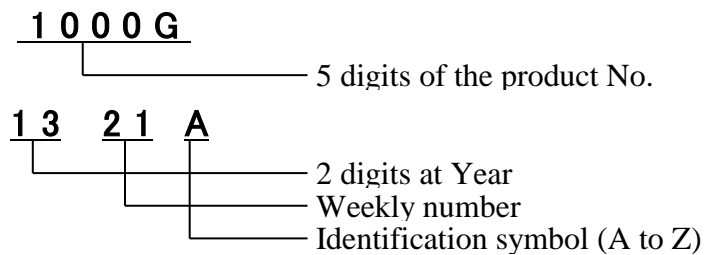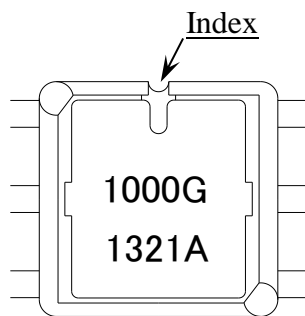

## 7. Recommended soldering conditions

### ■ Reflow profile

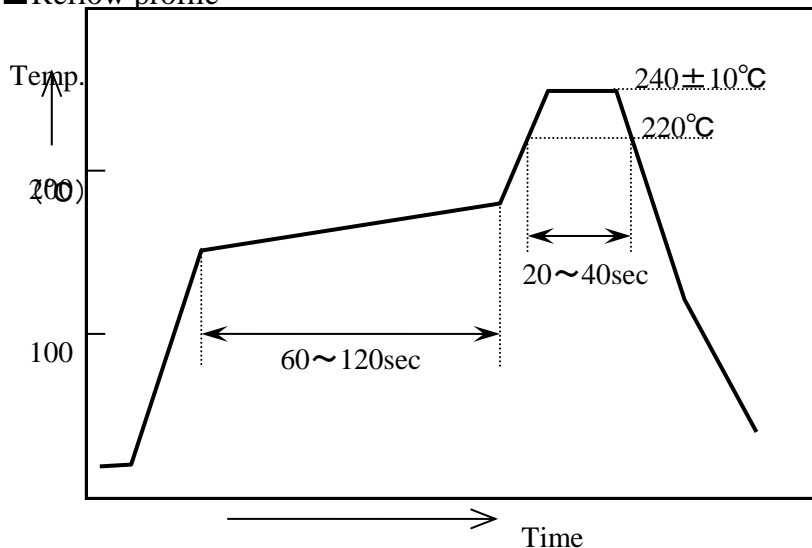


### Heating

Peak 250°C MAX, 10sec or less  
More than 220°C, 20~40sec

### Preheating

150~180°C, 60~120sec

### ■ Soldering pads

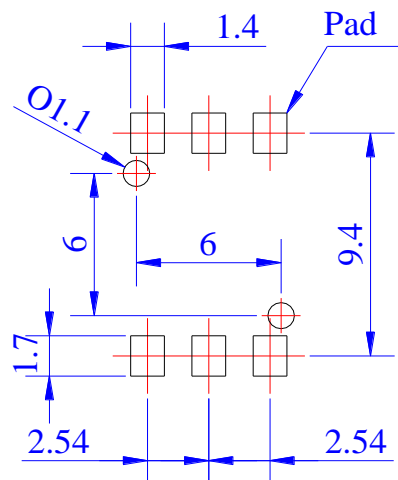

This footprint and Temperature profile do not guarantee of soldering quality.

Please check in advance at your factory before use.

## 8. Notes

- \* Please use this product within the range of absolute maximum ratings. There is fear of damage and the breakdown when used outside the range of absolute maximum ratings.
- \* There are possibilities of abnormalities or inferior performances, when irregular objects are put inside a pressure conductive hole.
- \* These sensors are not of drip-proof construction. When they are sprayed with water, etc., or dew drops are produced, there are possibilities where specified performances are not satisfied.
- \* These sensors do not correspond to washing. Please use it by no washing.
- \* If this product touches corrosive gas (organic solvent, sulfurous acid gas, hydrogen sulfide gas, etc.), it may have bad influence on performance.

## 9. Others

This product is intended to be used for general electrical equipment.

Please contact us in advance in case of the following application to be used;

Extremely-high reliability demanding applications, such as medical equipment, safety device, aerospace instrument, nuclear energy control equipment, combustion control apparatus and so on, which failure and/or malfunction could do serious damage to human life, body, property and so on, directly or indirectly.

\* Details are subject to change without notice.