Piezoelectric Sounders

Applicable for beep of keyboard, remote control and telephone ringer.

■Features

Small and light weight, low power consumption

Reliable, perpetual life

■Dimensions

Model No. HAS-RP2-14-41-11



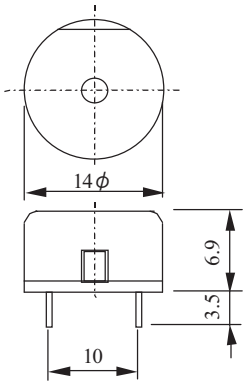

Model No. HAS-RP2-18-35-11

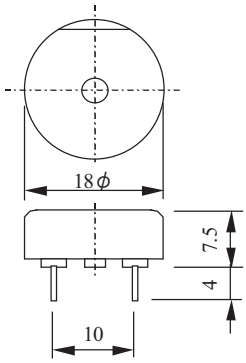

■Specifications

Item	HAS-RP2-14-41-11	HAS-RP2-18-35-11	Unit
Output sound pressure level (10 cm)	72 Min. (3Vp-p,4.096kHzsq.)	72 Min. (3Vp-p,3.5kHzsq.)	dB
Static capacitance (±30%,120kHz)	7.4	19.0	nF
Max. input voltage	30	15	Vp-p
Weight	0.9	1.2	g

■Model Designation

H A S - Construction - Diameter - Frequency - Design No.

- Design No. — 01, 02, 03, ...
- Frequency — 2 digit in 100Hz
Ex. 2.048kHz=20 350Hz=03
- Diameter — 2 digit in mm.
- Construction — R: With resonance cavity W: Lead terminal 2: 2terminal
X: Half resonance cavity P: Pin terminal 3: 3terminal
- HAS — Model No.